

# CTD4 relay - Multifunction customizable timer, 4 pole

## Datasheet

**This relay is obsolete from January 1, 2023**

*Part of universal timer relay D-platform*



*Picture is an example, many different configurations possible*

## Description

Plug-in electronic industrial customizable timer relay with four change-over contacts. Fully customizable according customer's requirements concerning timing diagram and delay type. Almost any timing diagram is possible: for example time delays with delay on pull-in, on drop-out or both, symmetrical or asymmetrical flashing, 1-shot, 2-shot, 3-shot etc. or a combination of all these. Delay/pulse times are adjustable with 1 or 2 lockable knobs. The relay can also be supplied with fixed delay/pulse times (no knobs).

The relay has standard four change-over contacts which work according the timing diagram. Also 2 instantaneous change-over contacts and 2 timer change-over contacts are possible, to cover virtually all needs. Besides being activated by a voltage level, it is possible to activate the relay via a command input as well. The relay is equipped with two LEDs which indicate the presence of power supply and energizing of the coil. Optionally equipped with magnetic arc blow-out for high breaking capacity and long contact life.

The construction of the relay and choice of materials makes the CTD4 relay suitable to withstand low and high temperatures, shock & vibrating and dry to humid environments. No external retaining clip needed as integrated 'snap-lock' will hold relay into socket under all circumstances and mounting directions.

## Application

Rugged plug-in relays for extreme reliable, long endurance applications in harsh environment. These relay series are designed for demanding industrial applications such as power utilities and petrochemical industries. The CTD4 relay can be used in all industrial applications where a standard or non-standard timer function is necessary.

### Features

- Fully customizable timer relay
- Compact plug-in design
- 4 time delayed C/O contacts or 2 time delayed C/O contacts and 2 instantaneous C/O contacts
- Delay/pulse times adjustable with 1 or 2 lockable knobs
- Also available with fixed delay/pulse times (no knobs)
- Delay/pulse times: between 0 s...∞ (no limits)
- Two LEDs for status indication
- Suitable for DC and AC voltage
- Flat, square and silver plated relay pins for excellent socket connection
- Wide range of sockets
- Integrated snap lock
- Transparent cover
- Optional positive mechanical keying relay to socket
- Flexibility by many options


### Industry compliancy

- IEC 61812-1 Time relays for industrial and residential use
- IEC 60947 Low voltage switch gear and control gear
- IEC 60947-5-1 Electromechanical control circuit devices and switching elements
- IEC 60255 Relay design and environmental conditions
- EMC Directive
- CE



# CTD4 relay

## Technical specifications

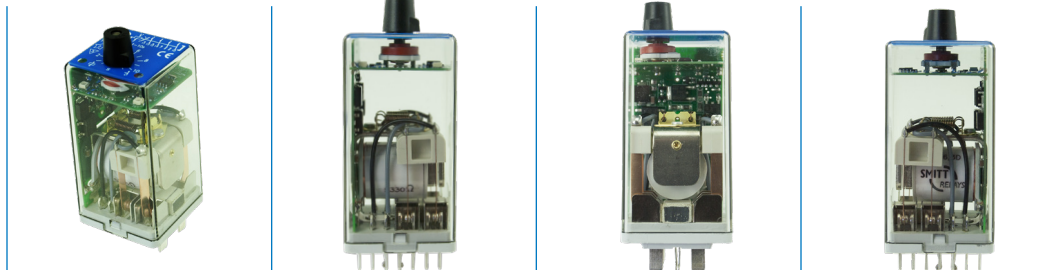

Picture is an example, many different configurations possible

### Timing diagrams: all different timing diagrams are possible

Some examples

When supply voltage is applied, after period T1 the relay is activated once for period T2.

The relay is reset when supply voltage is removed.

When supply voltage is applied, after period T1 the relay is activated for period T2.


After period T3 the relay is again activated for period T2, which repeats until supply voltage is removed which resets the relay.



# CTD4 relay


## Technical specifications

### Some examples

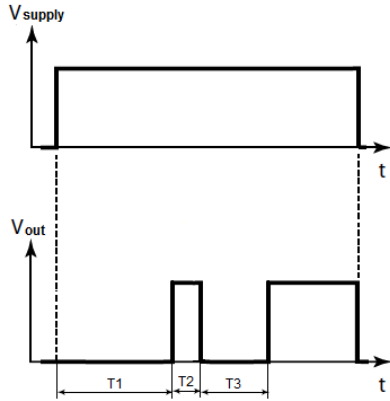


When supply voltage is applied, after period  $T_1$  the relay is activated for period  $T_2$ .

After period  $T_3$  the relay is activated again until the supply voltage is removed, which resets the relay.

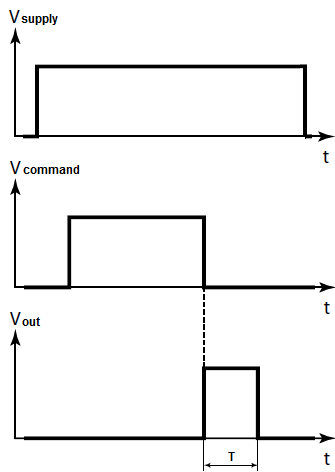

Supply voltage and command voltage is applied to the relay. The relay is activated for period  $T$  when command voltage is removed.

The relay is reset after period  $T$  or when supply voltage is removed.

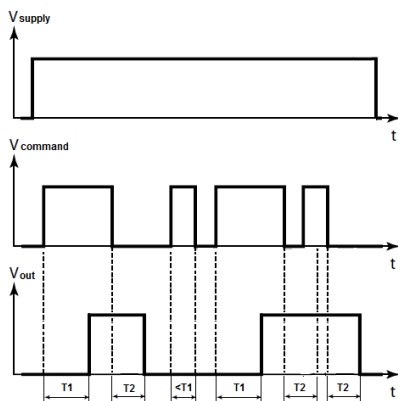

Supply voltage is applied to the relay. When command voltage is applied, after period  $T_1$  the relay is activated if the command voltage is supplied during  $T_1$ .

When control voltage is removed, after period  $T_2$  the relay is de-activated unless control voltage is applied again within period  $T_2$ .


The relay is reset after period  $T_2$  if the relay is de-activated or when supply voltage is removed.



# CTD4 relay


## Technical specifications

### Some examples

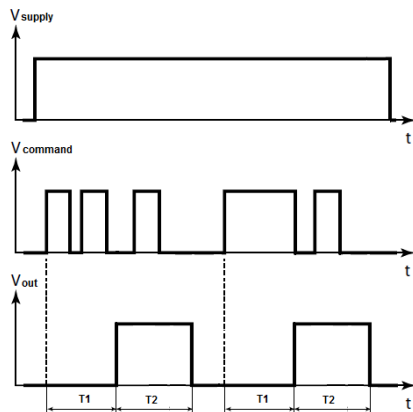

Supply voltage is applied to the relay. When command voltage is applied, after period  $T1$  the relay is activated for period  $T2$  regardless of the command voltage.

The relay is reset after period  $T2$  or when supply voltage is removed.

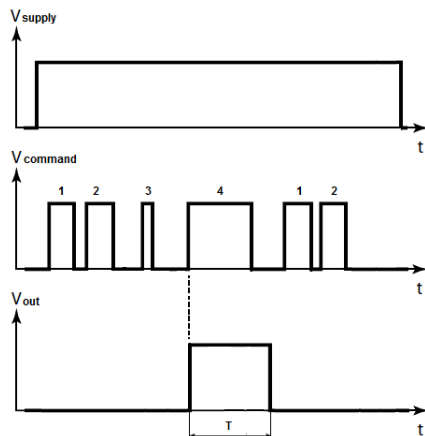

Supply voltage is applied to the relay. The 4<sup>th</sup> time a command voltage is applied regardless of the duration of the command voltage, the relay is activated for period  $T$  regardless the command voltage.

The relay is reset after period  $T$  or when supply voltage is removed.


#### Remarks:

1. Delay/pulse times can be adjustable or fixed; maximum 2 adjustable times possible (maximum of 2 adjustable knobs), if more times needed those must be fixed
2. Many other diagrams are possible, please contact Mors Smitt to optimize the timing diagram for your application
3. Number of change-over contacts depends on desired timing diagram



# CTD4 relay

## Technical specifications

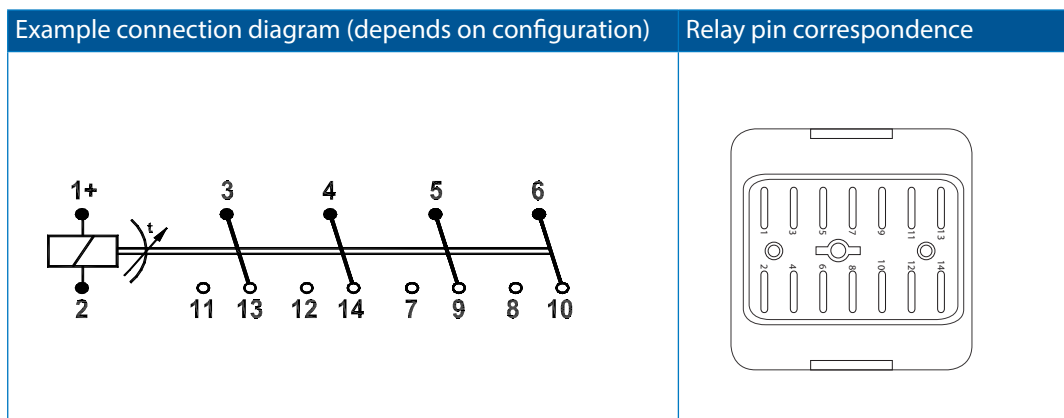

### Coil characteristics

Operating voltage range	0.8...1.1 $U_{nom}$
Nominal power consumption	Depends on configuration
Nominal voltages	Depends on requirements, typical any value between 24-250 VAC/VDC

### Contact characteristics

Amount and type of contacts	Max. 4 C/O, depends on configuration
Maximum make current	16 A
Peak inrush current	200 A (withstand > 10 x 200 A @ 10 ms, 1 min)
Maximum continuous current	10 A (AC1 ; IEC 60947)
Maximum switching voltage	250 VDC, 440 VAC
Minimum switching voltage	12 V
Minimum switching current	10 mA
Maximum breaking capacity	110 VDC, 8 A (L/R ≤ 15 ms) 230 VAC, 10 A (cos φ ≥ 0.7)
Contact resistance	15 mΩ (initial)
Material	Ag standard (optional AgSnO <sub>2</sub> , Au on Ag)
Contact gap	0.7 mm
Contact force	> 200 mN

Remark: For configuration with 2 instantaneous and 2 timer contacts values may differ.

### Electrical characteristics

Dielectric strength	EN 50155
Pole-pole	IEC 60255-5 4 kV, 50 Hz, 1 min
Cont-coil	IEC 60077 2 kV, 50 Hz, 1 min
Pulse withstanding	IEC 60255-5 5 kV (1.2/50 μs)
Insulation between open contacts	2.5 kV; 50 Hz; 1 min



# CTD4 relay

## Technical specifications


### Mechanical characteristics

Mechanical life	30 x 10 <sup>6</sup> operations
Maximum switching frequency	Mechanical: 3600 ops/h Electrical: 1200 ops/h
Maximum torque value screw to lock knob	0.15 Nm
Weight	±190 g (depending on configuration)

### Environmental characteristics

Environmental	IEC 61810
Vibration	IEC 61373, Category I, Class B, Body mounted
Shock	IEC 61373, Category I, Class B, Body mounted
Operating temperature	-25 °C...+55 °C (with option C : -40 °C, with option V: +70°C)
Humidity	93%
Salt mist	IEC 60068-2-11, class 4
Damp heat	IEC 60068-2-30, Test method Db variant 1
Protection	IEC 60529, IP40 (relay on socket) (with option K: IP50)
Fire & smoke	NF F 16-101, NF F16-102, EN 45545-2
Insulation materials	Cover: polycarbonate Base: polyester


### Dimensions (mm)

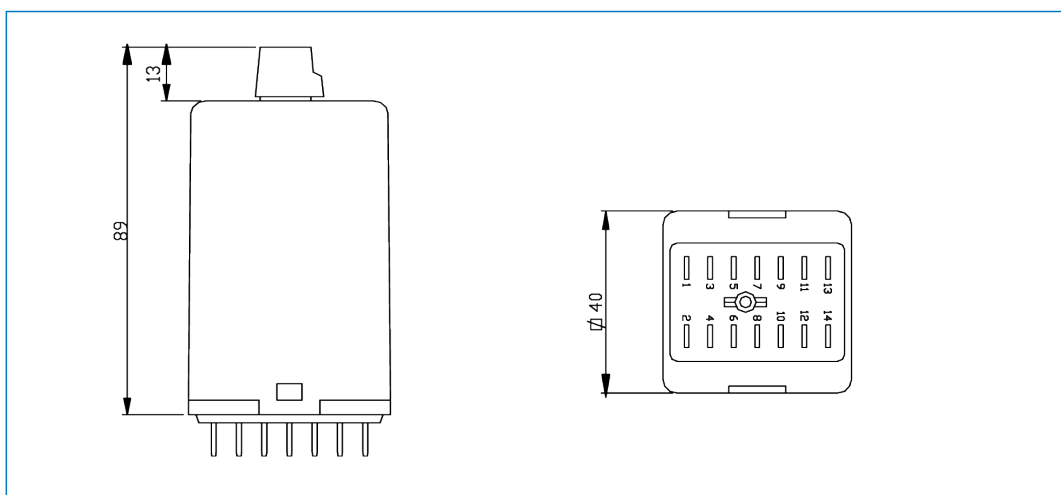

# CTD4 relay

## Technical specifications

### Options

Description	Remark	Can not be combined with
B Magnetic arc blow-out. Ensures a high DC breaking capacity and longer contact life.		
C Lower temperature (-40 °C).	Max contact current 8A	
E Gold plated contacts. Low contact resistance and good resistance against corrosive atmospheres. Suitable for switching low level dry circuit loads.  Gold plated contacts characteristics Material Ag, 10 µm gold plated Maximum switching voltage 60 V (higher voltages may be possible, contact Mors Smitt for more information) Maximum switching current 400 mA (at higher rate gold will evaporate, then the standard silver contact rating of minimum 10 mA and 12 V is valid) Minimum switching voltage 5 V Minimum switching current 1 mA		M
K Dust protection. Cover sealed with sealant.	IP50*	
M AgSnO <sub>2</sub> contacts. Highly resistant to welding, for safety and vital applications.	Min. contact current 100 mA	E
Q Double zener diode. Coil protection against transient voltage.	DC voltages only. Max. allowed peak voltage 180 V. Higher voltage will damage the diode	
V Wider operating range and ambient temperature. Operating range: DC 0.7...1.25 U <sub>nom</sub> AC 0.8...1.2 U <sub>nom</sub> Ambient temperature: -25 °C...+70 °C	Higher power consumption Operating range AC can differ	
Y Double make/double break contacts.	2 C/O DM/DB, -40 °C 	

\*IP50 Cat2 for relays mounted in a Mors Smitt socket, application PD1/PD2 and contact load >0.5A.

Coloured cover and keying of relay on socket on request




# CTD4 relay

## Technical specifications

### Electrical life expectancy and breaking capacity


The life expectancy values shown below are based on factory tests (test frequency at 1/3 Hz). These values could be different in real life applications as environmental conditions, switching frequencies and duty cycles will influence these values.

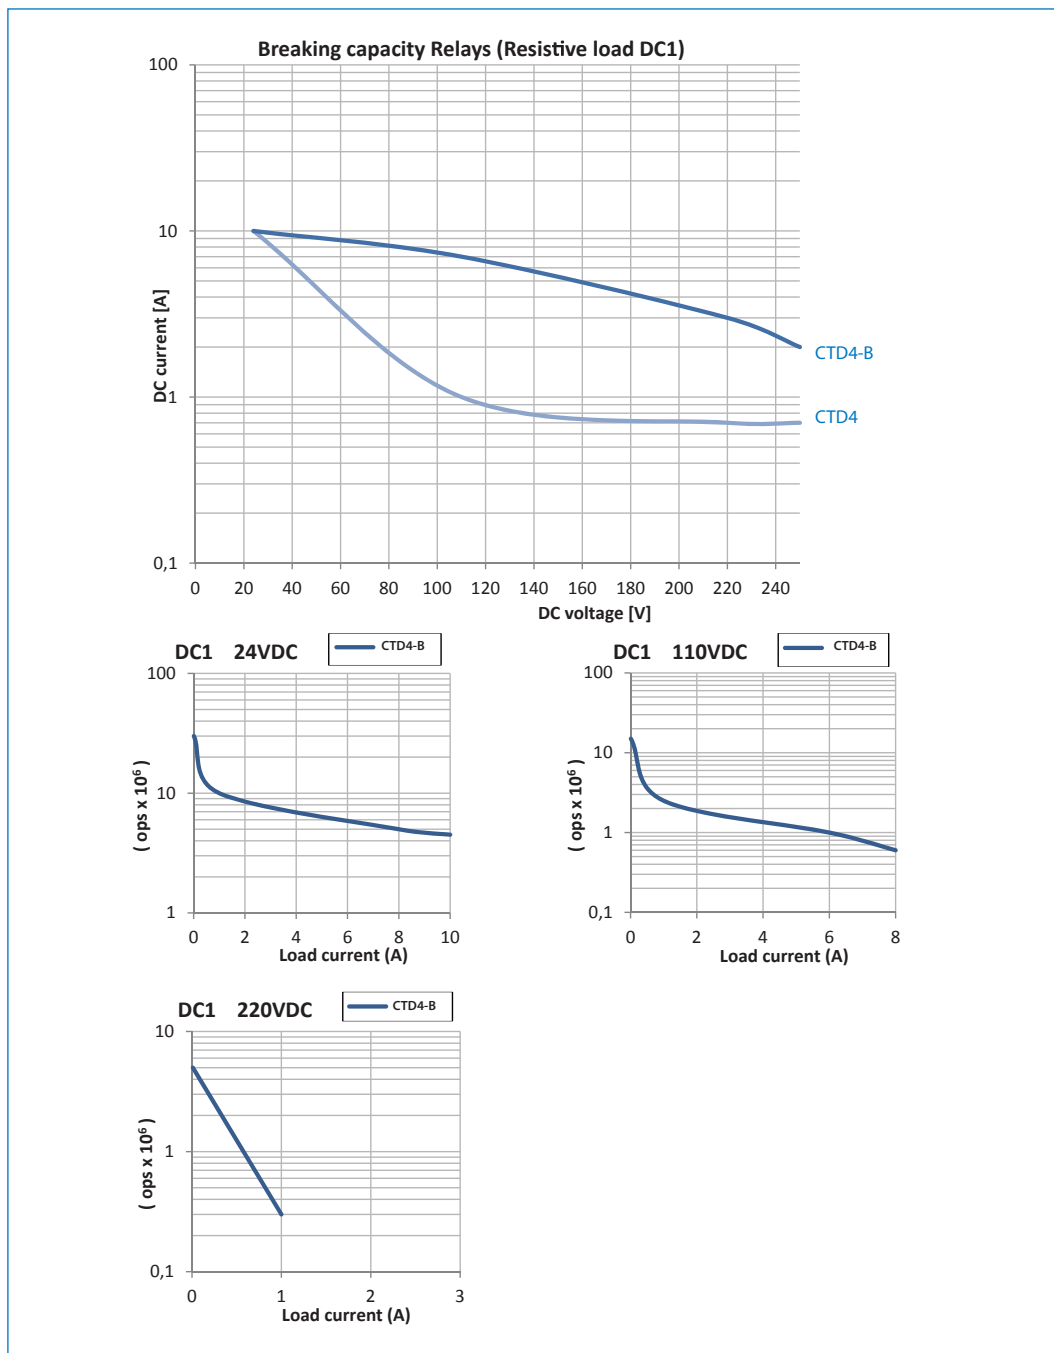



# CTD4 relay

## Technical specifications

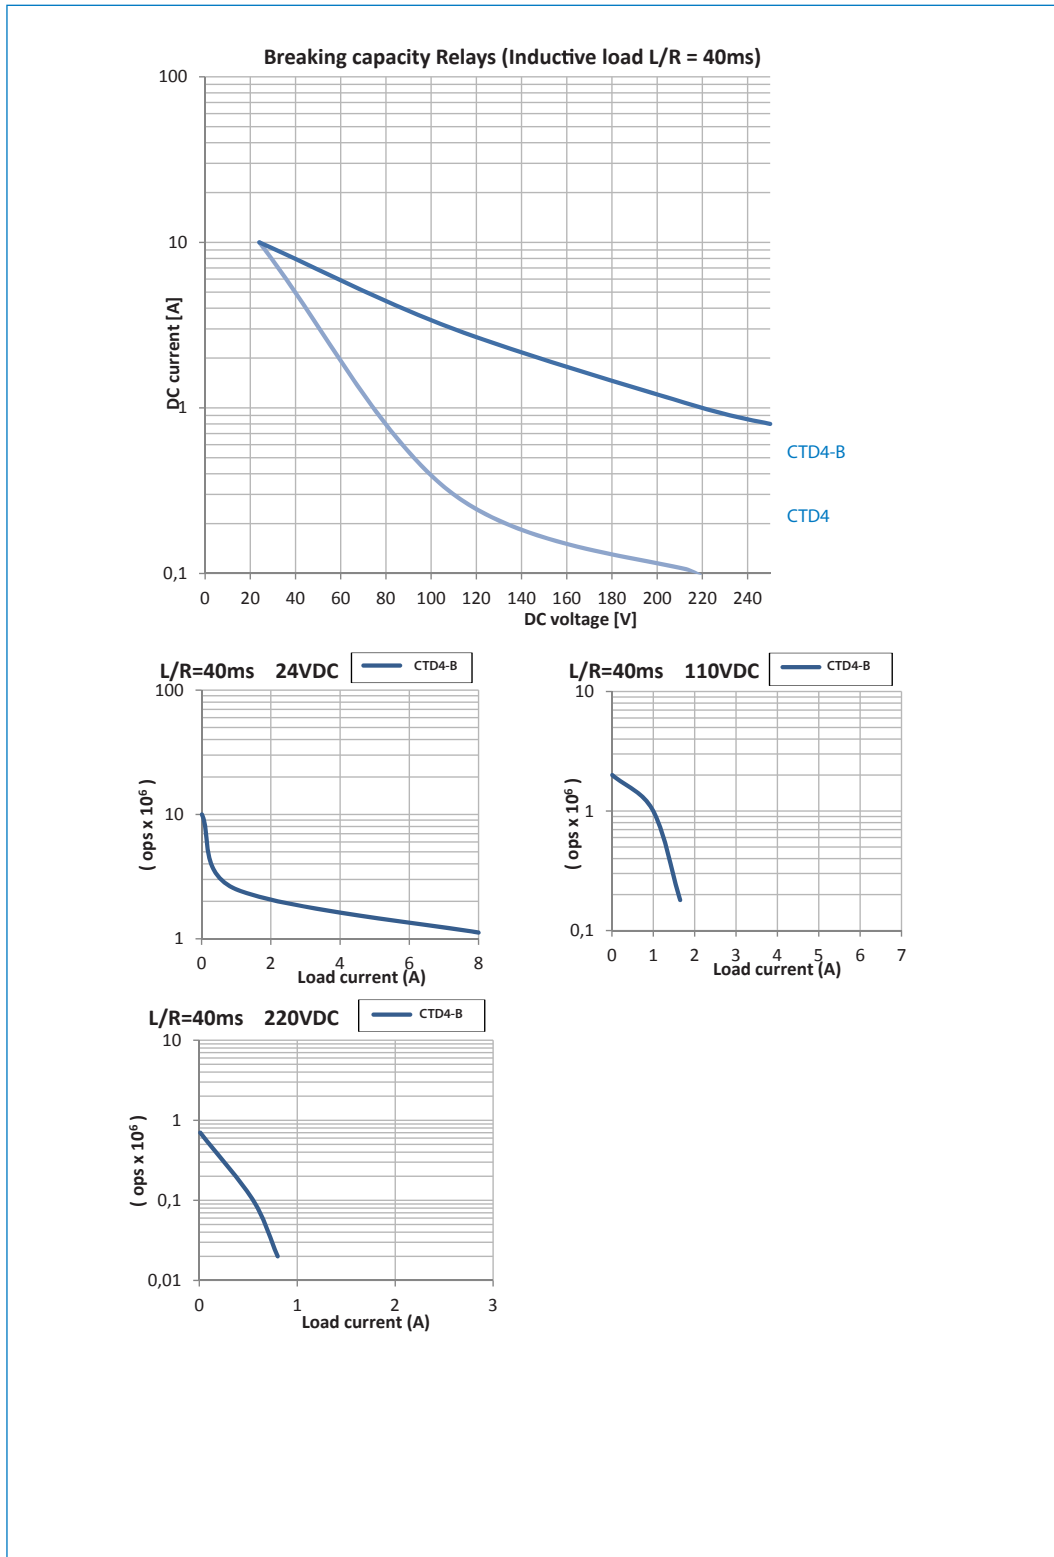

# CTD4 relay Sockets

## Mounting possibilities/sockets



### Surface/wall mounting

338000302	V22BR	Screw socket, wall mount, front connection (9 mm terminals)
338000580	V23	Screw socket, wall mount, front connection (7.5 mm terminals)
338000610	V29	Spring clamp socket, wall mount, front dual connection (2.5 mm <sup>2</sup> )

### Rail mounting

338000580	V23	Screw socket, rail mount, front connection (7.5 mm terminals)
338000402	V23BR	Screw socket, rail mount, front connection (9 mm terminals)
338000610	V29	Spring clamp socket, rail mount, front dual connection (2.5 mm <sup>2</sup> )

### Panel/flush mounting

338100100	V3	Solder tag socket, panel mount, rear connection
328400100	V26	Crimp contact socket, panel mount, rear connection, A260 crimp contact
338000560	V31	Faston connection socket, rear dual connection (6.3 mm)
338000570	V33	Spring clamp socket, flush mount, rear dual connection (2.5 mm <sup>2</sup> )



### PCB mounting

338000561	V32	PCB soldering socket
-----------	-----	----------------------

For more details see datasheets of the sockets

# CTD4 relay Keying

## Mechanical keying relay and socket (optional)

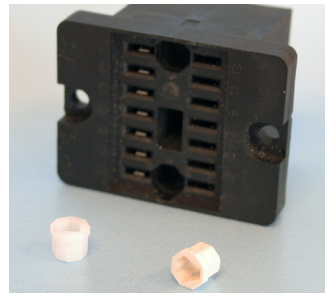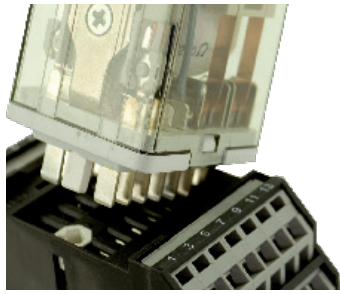

Function:


- To prevent wrong installation
- To prevent damage to equipment
- To prevent unsafe situations

Using keyed relays and sockets prevents a relay is inserted in a wrong socket. For example it prevents that a 24 VDC relay is put in a 110 VDC circuit. Positive discrimination is possible per different function, coil voltage, timing, monitoring, safety and non-safety.

The D relay socket keying option gives  $8 \times 8 = 64$  possibilities. Upon ordering the customer simply indicates the need for the optional keying. Mors Smitt will assign a code to the relay and fix the pins into the relay. The sockets are supplied with loose key receptacles. Inserting the keys into the socket is very simple and self explaining.


Remark: Sockets and relay shown are only examples.

Top view socket

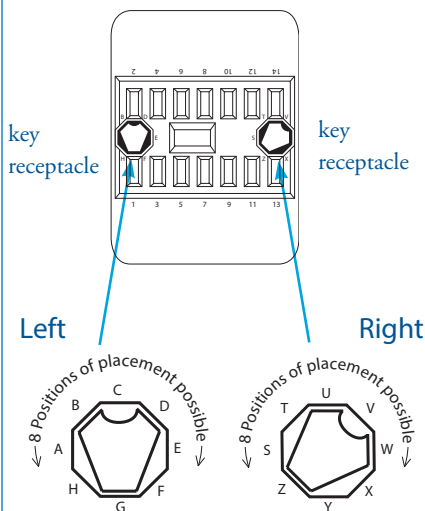

Example keying position G-Z on socket

Bottom view relay

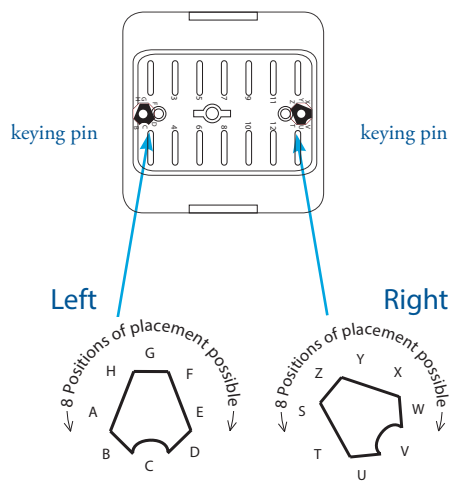

Example keying position G-Z on relay



# CTD4 relay Instructions

## Installation, operation & inspection


### Installation

Before installation or working on the relay: disconnect the power supply first! Install socket and connect wiring according to the terminal identification. Plug relay into the socket ensuring there is no gap between the bottom of relay and the socket. Reverse installation into the socket is not possible due to the mechanical blocking snap-lock feature. Check to ensure that the coil connection polarity is not reversed. Relays can be mounted tightly together to save space.

When rail mounting is used, always mount the socket in the direction of the UP arrow, to have proper fixation of the socket on the rail.

### Warning!

- Never use silicon in the proximity of the relays.
- Do not use the relay in the presence of flammable gas as the arc generated from switching could cause ignition.
- To remove relays from the socket, employ up and down lever movements. Sideway movement may cause damage to the coil wires.

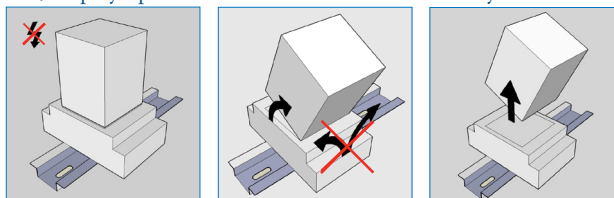

### Operation

After installation always apply the rated voltage to the coil to check correct operation.

Long term storage may corrode the silver on the relay pins. When plugging the relay into the socket, the female bifurcated or trifurcated receivers will automatically cut through the corrosion on the pins and guarantee a reliable connection.

Before actual use of relays, it is advised to switch the load several times with the contacts. The contacts will both be electrically and mechanically cleaned due to the positive wiping action. Sometimes a contact can build up increased contact resistance ( $\leq 15 \text{ m}\Omega$  when new). When using silver contacts one can clean the contact by switching a contact load a few times using  $>24 \text{ VDC}$  &  $\sim 2 \text{ A}$ . Increased contact resistance is not always problematic, as it depends on circuit conditions. In general a contact resistance of  $1 \Omega$  is no problem, consult Mors Smitt for more information.

Condensation in the relay is possible when the coil is energised (warm) and the outside, environmental temperature is cold. This is a normal phenomenon and will not affect the function of the relay. Materials in the relay have no hygroscopic properties.

### Inspection

Correct operation of the relay can easily be checked as the transparent cover provides good visibility of the moving contacts. If the relay does not seem to operate correctly, check for presence of the appropriate coil voltage and polarity using a suitable multimeter. If a LED is fitted, it indicates voltage presence to the coil. If coil voltage is present, but the relay does not operate, a short circuit of the suppression diode is possible (This may be due to the coil connection having been reversed).

If the relay doesn't work after inspection, replace the relay unit with a similar model. Do not attempt to open the relay cover or try to repair. Contacts are calibrated and in balance, touching can affect proper operation. Also re soldering may affect correct operation. Since 2009 relays have tamper proof seals fitted and once broken, warranty is void.

Most relay defects are caused by installation faults such as over voltage, spikes/transients, high/short current far exceeding the relay specifications. When returning the relays for investigation, please provide all information on the RMA form. Send defective relays back to the manufacturer for repair or replacement. Normal wear and tear or external causes are excluded from warranty.

# CTD4 relay

## Ordering scheme

Configuration:



1. Relay model
2. Coil voltage
3. Options
4. Reference to specific requirements

This example represents a **CTD4-048-C Ref 0312**

**Description:** CTD4 relay,  $U_{nom}$ : 48 VDC/AC, low temperature (-40 °C), ref0312

### 1. Relay model

**CTD4**

### 2. Coil voltages

<b>024</b>	24 VDC/AC
<b>048</b>	48 VDC/AC
<b>060</b>	60 VDC/AC
<b>110</b>	110 VDC/AC
<b>125</b>	125 VDC/AC
<b>220</b>	220 VDC/VAC

Other voltages on request

### 3. Options

<b>B</b>	Magnetic arc blow-out
<b>C</b>	Low temp. (-40 °C) - Max. contact current 8 A
<b>E</b>	Gold plated contacts
<b>K</b>	Dust protection, IP50
<b>M</b>	AgSnO <sub>2</sub> contacts, highly resistant to welding
<b>Q</b>	Double zener diode
<b>V</b>	Wider operation range and ambient temperature
<b>Y</b>	Double make double break contacts

Upon ordering indicate keying if necessary.

### 4. Reference to specific requirements

**Ref xxxx** Customer specific configuration





**Mors Smitt France SAS**

Tour Rosny 2, Avenue du Général de Gaulle,  
F - 93118 Rosny-sous-Bois Cedex, FRANCE  
T +33 (0)1 4812 1440, F +33 (0)1 4855 9001  
E [sales.msf@wabtec.com](mailto:sales.msf@wabtec.com)

**Mors Smitt Asia Ltd.**

29/E, Fun Towers, 35 Hung To Road  
Kwun Tong, Kowloon, HONG KONG SAR  
T +852 2343 5555, F +852 2343 6555  
E [sales.msa@wabtec.com](mailto:sales.msa@wabtec.com)

**Mors Smitt B.V.**

Vrieslantlaan 6, 3526 AA Utrecht,  
NETHERLANDS  
T +31 (0)30 288 1311  
E [sales.msbv@wabtec.com](mailto:sales.msbv@wabtec.com)

**Mors Smitt Technologies Inc.**

1010 Johnson Drive,  
Buffalo Grove, IL 60089-6918, USA  
T +1 847 777 6497, F +1 847 520 2222  
E [salesmst@wabtec.com](mailto:salesmst@wabtec.com)

**Mors Smitt UK Ltd.**

Graycar Business Park, Barton under Needwood,  
Burton on Trent, Staffordshire, DE13 8EN, UK  
T +44 (0)1283 722650 F +44 (0)1283 722651  
E [sales.msuk@wabtec.com](mailto:sales.msuk@wabtec.com)

**RMS Mors Smitt**

6 Anzed Court, Mulgrave,  
VIC 3170, AUSTRALIA  
T +61 (0)3 8544 1200 F +61 (0)3 8544 1201  
E [sales.rms@wabtec.com](mailto:sales.rms@wabtec.com)